


## Hobby high pressure hoses

Quick screw coupling : male thread / plug

f thread

m thread

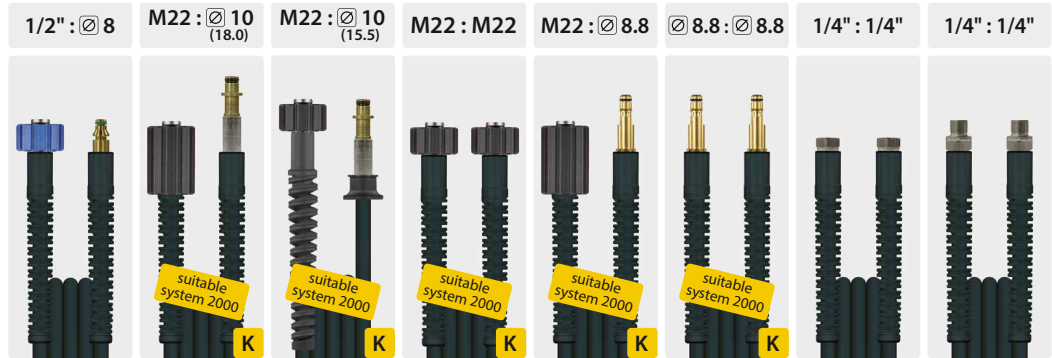

Hoses with single wire braid and *smooth* cover

| TYP   | DN | P       | °C     | ↔    | R+M Nr.     | R+M Nr.     | R+M Nr.     | R+M Nr.       | R+M Nr.       | R+M Nr.       | R+M Nr.     | R+M Nr.     |
|-------|----|---------|--------|------|-------------|-------------|-------------|---------------|---------------|---------------|-------------|-------------|
| Flexy | 6  | 300 bar | 100 °C | 8 m  | 390 033 208 | 390 028 208 |             | 390 000 208   | 390 010 520 8 | 390 010 420 8 | 390 052 208 | 390 042 210 |
|       |    |         |        | 9 m  |             | 390 028 209 | 390 010 209 | 390 010 520 9 | 390 010 420 9 |               |             |             |
|       |    |         |        | 10 m | 390 033 210 | 390 028 210 | 390 010 210 | 390 000 210   | 390 010 521 0 | 390 010 421 0 | 390 052 210 |             |
|       |    |         |        | 15 m | 390 033 215 | 390 028 215 | 390 010 215 | 390 000 215   | 390 010 521 5 | 390 010 421 5 | 390 052 215 | 390 042 215 |
|       |    |         |        | 20 m | 390 033 220 | 390 028 220 | 390 010 220 | 390 000 220   | 390 010 522 0 | 390 010 422 0 | 390 052 220 | 390 042 220 |

Plastic hoses with single fabric braid

| TYP   | DN | P       | °C    | ↔    | R+M Nr.     | R+M Nr.     | R+M Nr.     | R+M Nr.       | R+M Nr.       | R+M Nr.       | R+M Nr.     | R+M Nr.     |
|-------|----|---------|-------|------|-------------|-------------|-------------|---------------|---------------|---------------|-------------|-------------|
| Polya | 6  | 160 bar | 60 °C | 8 m  | 460 033 208 | 460 028 208 | 460 010 208 | 460 000 208   | 460 010 520 8 | 460 010 420 8 | 460 052 208 | 460 042 208 |
|       |    |         |       | 9 m  |             | 460 028 209 | 460 010 209 | 460 010 520 9 | 460 010 420 9 |               |             |             |
|       |    |         |       | 10 m | 460 033 210 | 460 028 210 | 460 010 210 | 460 000 210   | 460 010 521 0 | 460 010 421 0 | 460 052 210 | 460 042 210 |
|       |    |         |       | 15 m | 460 033 215 | 460 028 215 | 460 010 215 | 460 000 215   | 460 010 521 5 | 460 010 421 5 | 460 052 215 | 460 042 215 |
|       |    |         |       | 20 m |             |             | 460 000 220 | 460 010 522 0 | 460 010 422 0 |               |             |             |

Symbols  $\varnothing$  diameter DN nominal diameter P pressure °C temperature ↔ length TYP type